


DETAIL USED FOR THE FOLLOWING ROAD CLASSIFICATIONS
(DETERMINED BY COUNTY OF GREENVILLE):

- LOCAL RESIDENTIAL
- LOCAL COLLECTOR
- ALLEY

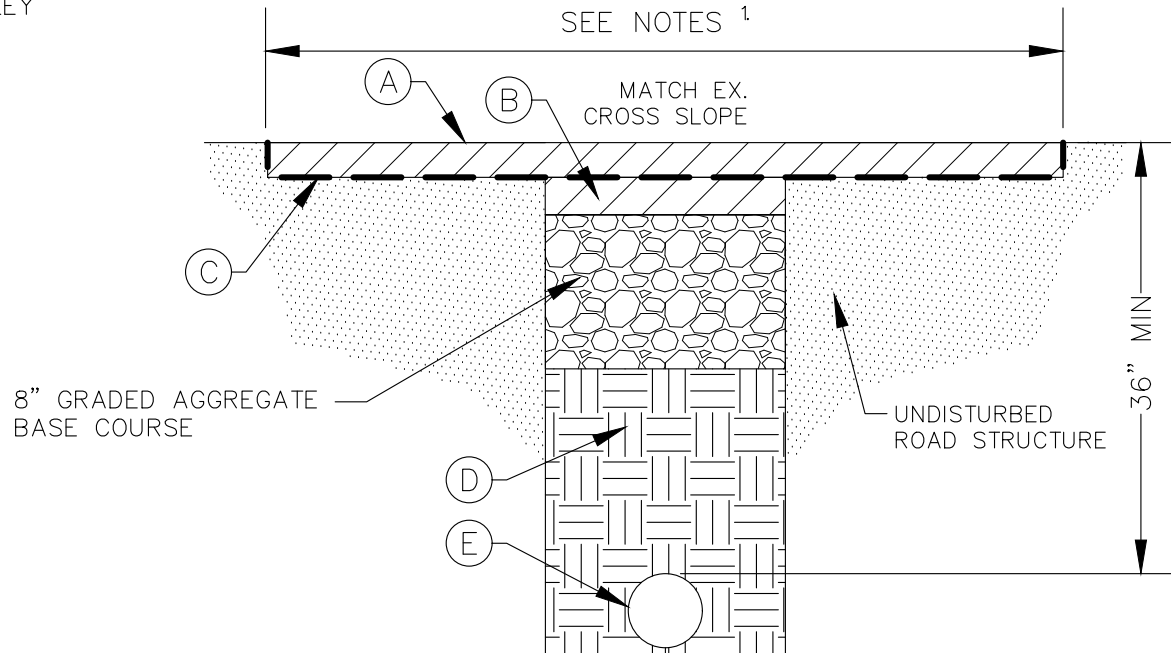

- (A) 2" HMA SURFACE COURSE TYPE C PER SCDOT STANDARD SPECIFICATIONS (403)
- (B) 2" HMA SURFACE COURSE TYPE C PER SCDOT STANDARD SPECIFICATIONS OR MATCH EXISTING THICKNESS, WHICHEVER IS GREATER. INSTALL IN 2" LIFTS
- (C) TACK COAT PER SCDOT STANDARD SPECIFICATIONS (401.4.18)
- (D) SELECT BACKFILL MATERIAL COMPACTED IN 6" LIFTS TO 95% OF STANDARD PROCTOR OR #57 STONE INSTALLED IN 6" LIFTS
- (E) PIPELINE WITH BEDDING INSTALLED IN ACCORDANCE GREENVILLE COUNTY LAND DEVELOPMENT REGULATIONS

NOTES:

- 1.) WIDTH OF FINAL ASPHALT SURFACE COURSE SHALL BE DETERMINED BY TRENCH LOCATION PER DETAILS 1-7 AND 1-8
- 2.) ALL CUTS TO THE ASPHALT SHALL BE STRAIGHT AND VERTICAL SAW CUTS. UNDERCUT PAVEMENT AND/OR PAVEMENT DAMAGED DURING EXCAVATION SHALL BE REMOVED AND REPLACED PER THIS DETAIL.
- 3.) MILLING IS REQUIRED ON ROADS WITH CONCRETE CURB OR ROADS REQUIRING HALF-WIDTH RESTORATION. MILLING SHALL BE PERFORMED PER SCDOT STANDARD SPECIFICATIONS



STANDARD PAVEMENT REPAIR FOR
LONG LONGITUDINAL UTILITY CUTS

Rev. Number 1

Rev. Date 6/2/2025

Scale:
NTS

Detail:
1-3